

# Ø 30 mm Push Button Switches



## S3PR / S3PF Series CATALOG

For your safety, read and follow the considerations written in the instruction manual, other manuals and Autonics website.

The specifications, dimensions, etc. are subject to change without notice for product improvement. Some models may be discontinued without notice.

### Features

- Smooth operation
- High electrical conductivity
- Long-lasting durability

### Specifications

Series	S3PR Series	S3PF Series
Actuation distance	5.0 to 5.5 mm	
Actuation force	0.5 kgf (4.9 N) (per 1 contact)	
Installation	Extended	Flush
Shock	300 m/s <sup>2</sup> (≈ 30 G) in each X, Y, Z direction for 3 times	
Shock (malfunction)	100 m/s <sup>2</sup> (≈ 10 G) in each X, Y, Z direction for 3 times	
Vibration	1.5 mm amplitude at frequency of 10 to 55 Hz (for 1 min) in each X, Y, Z direction for 2 hours	
Vibration (malfunction)	1.5 mm amplitude at frequency of 10 to 55Hz (for 1 min) in each X, Y, Z direction for 10 minutes	
Mechanical life cycle (control unit life cycle)	Returned: ≥ 1 million operations (20 operations/min)	
Ambient temperature	-15 to 55 °C, storage: -25 to 65 °C (no freezing or condensation)	
Ambient humidity	35 to 85 %RH, storage: 35 to 85 %RH (no freezing or condensation)	
Protection structure	Control unit: IP52 (IEC standard)	
Approval	CE ENEC us ENEC PS	
Control unit weight	21.5 g	
Housing weight	≈ 7 g	

Contact blocks	
Power supply / current	110 VAC~ / 10 A, 250 VAC~ / 6 A
Dielectric strength	2,500 VAC~ 50/60 Hz for 1 minute
Insulation resistance	≥ 1,000 MΩ (500 VDC≡ megger)
Contact resistance	≤ 20 mΩ (initial)
Electrical life cycle	≥ 100,000 operations (20 operations/min)
Contact material	AgNi10
Approval	CE ENEC us ENEC PS
Weight	Modular type: ≈ 10 g, Singular type: ≈ 11 g
LED blocks	
Rated voltage	AC/DC voltage type: 12-24 VAC~ 50/60 Hz, 12-24 VDC≡ AC voltage type: 110-220 VAC~ 50/60 Hz
Current consumption	≤ 20 mA
Approval	CE ENEC us ENEC
Weight	AC/DC voltage type: ≈ 11 g, AC voltage type: ≈ 12 g

### Sold Separately

- Contact blocks (SA□-C□□)
- LED blocks (SA□-L□□□)
- Locking handle (SA□-LH)
- Switch washer (SA-SW□)

## Ordering Information

This is only for reference. For selecting the specified model, follow the Autonics website.

Model is based on control unit+block combination. Control units or blocks are sold separately. In case of block, refer to control switch accessories.

### ■ Non-illuminated

<b>S3P</b>	<b>1</b>	-	<b>P</b>	<b>1</b>	<b>2</b>	<b>3</b>	<b>4</b>
Control unit						Block	

#### 1 Button type

R: Extended  
F: Flush

#### 2 Button color

R: Red  
B: Blue  
G: Green  
Y: Yellow  
K: Black

#### 3 Contact block

A: 1 A contact  
2A: 2 A contacts  
3A: 3 A contacts  
B: 1 B contact  
2B: 2 B contacts  
3B: 3 B contacts  
AB: 1 A contact, 1 B contact  
2AB: 2 A contacts, 1 B contact  
A2B: 1 A contact, 2 B contacts

#### 4 Block

No mark: Singular type  
M: Modular type

Model	Contact block		LED block	
	A contact	B contact	AC/DC voltage	AC voltage
S3PR-P1□A(M)	1	-	-	-
S3PR-P1□2A(M)	2	-		
S3PR-P1□3A(M)	3	-		
S3PR-P1□B(M)	-	1		
S3PR-P1□2B(M)	-	2		
S3PR-P1□3B(M)	-	3		
S3PR-P1□AB(M)	1	1		
S3PR-P1□2AB(M)	2	1		
S3PR-P1□A2B(M)	1	2		
S3PF-P1□A(M)	1	-		
S3PF-P1□2A(M)	2	-	-	-
S3PF-P1□3A(M)	3	-		
S3PF-P1□B(M)	-	1		
S3PF-P1□2B(M)	-	2		
S3PF-P1□3B(M)	-	3		
S3PF-P1□AB(M)	1	1		
S3PF-P1□2AB(M)	2	1		
S3PF-P1□A2B(M)	1	2		

### ■ Illuminated

<b>S3PF</b>	<b>1</b>	-	<b>P</b>	<b>3</b>	<b>2</b>	<b>3</b>	<b>4</b>	<b>5</b>
Control unit						Block		

#### 1 Letter marking

No mark: Push (control unit + singular type block)

No mark: None (control unit + modular type block)

U: None (control unit) <sup>01)</sup>

#### 2 Button color

R: Red  
B: Blue  
G: Green  
Y: Yellow  
W: White

#### 3 Contact block

A: 1 A contact  
2A: 2 A contacts  
B: 1 B contact  
2B: 2 B contacts  
AB: 1 A contact, 1 B contact

#### 4 LED block

D: 1 AC/DC voltage type  
L: 1 AC voltage type

#### 5 Block

No mark: Singular type  
M: Modular type


Model	Contact block		LED block	
	A contact	B contact	AC/DC voltage	AC voltage
S3PF-P3□AD(M)	1	-	1	-
S3PF-P3□2AD(M)	2	-		
S3PF-P3□BD(M)	-	1		
S3PF-P3□2BD(M)	-	2		
S3PF-P3□ABD(M)	1	1		
S3PF-P3□AL(M)	1	-	-	1
S3PF-P3□2AL(M)	2	-		
S3PF-P3□BL(M)	-	1		
S3PF-P3□2BL(M)	-	2		
S3PF-P3□ABL(M)	1	1		

01) Only available for control unit. Select the block separately.


## Dimensions

- Unit: mm, For the detailed drawings, follow the Autonics website.
- Panel thickness:  $\leq 6$  mm


### ■ S3PR-P1 □ (non-illuminated, extended, singular type block)

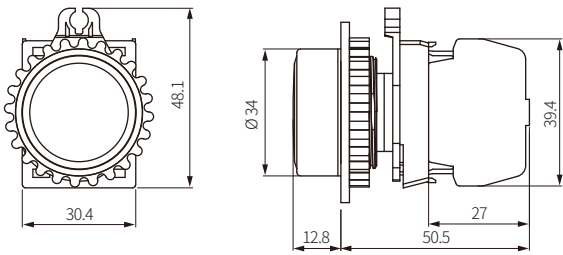


### ■ S3PR-P1 □ M (non-illuminated, extended, modular type block)




### ■ S3PF-P1 □ (non-illuminated, flush, singular type block)

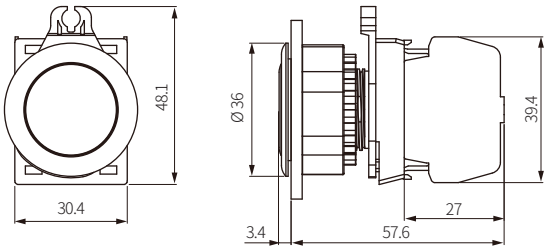


### ■ S3PF-P1 □ M (non-illuminated, flush, modular type block)



### ■ S3PF □-P3 □ (illuminated, flush, singular type block)

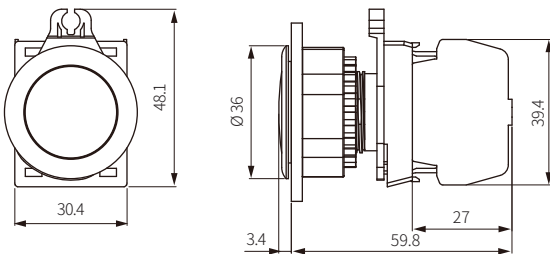

### ■ S3PF □-P3 □ M (illuminated, flush, modular type block)



### ■ Panel cut-out

